



# Cobble Drain

Plan

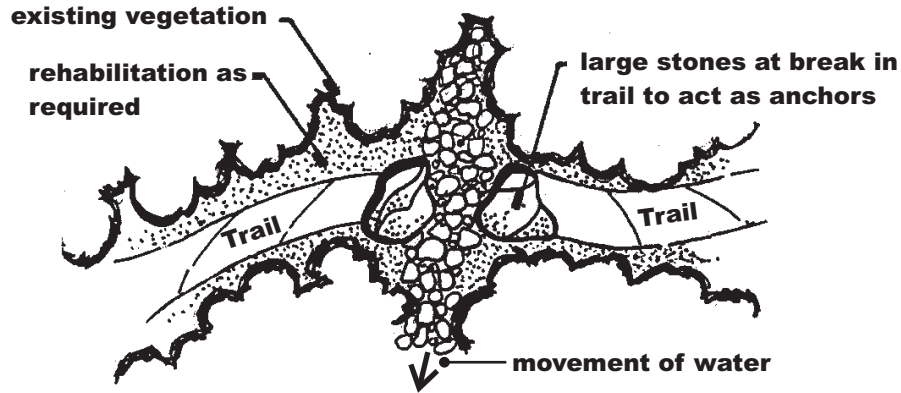


Section

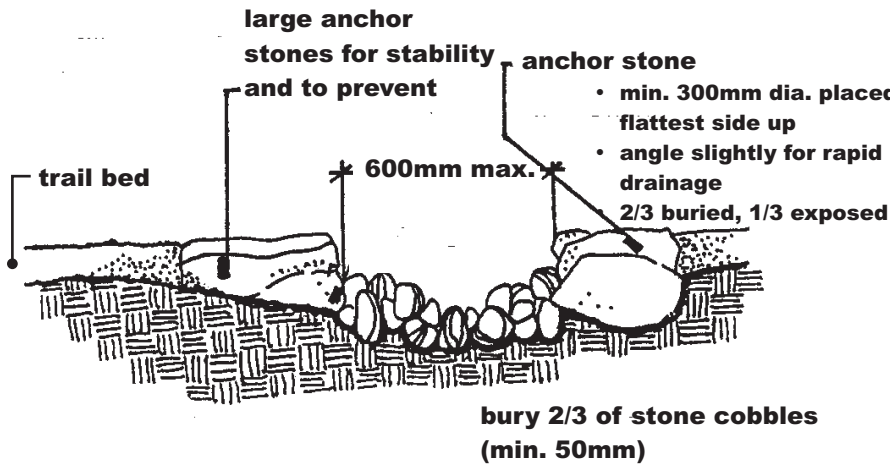


Plan

# Culvert Crossing

Section

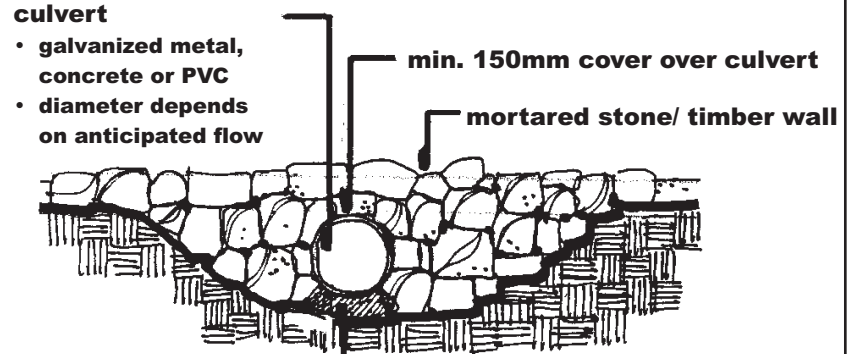

- galvanized metal, concrete or PVC
- diameter depends on anticipated flow
- select fill less than 25mm dia

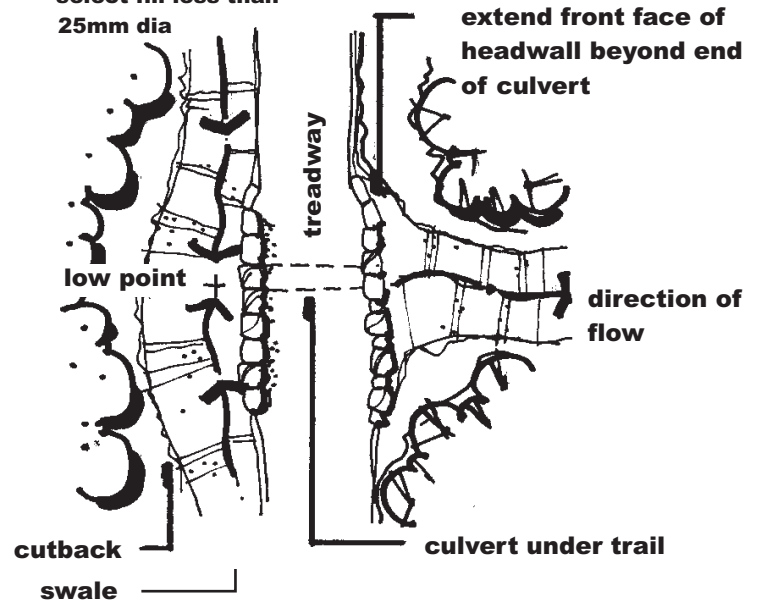

**Notes:**

1. The cobble drain is to be applied only on tertiary trails where it has been predetermined that persons using mobility assisted devices will not be accessing the trail
2. Culvert crossing or other suitable method of drainage control will be necessary on trail intended for full access

NOT TO SCALE

FILE: G3289/Report/Figures/Figure 5-22.CDR

Fig. 5-22 Drainage Across Tertiary Trails

